

Panel mounted receptacle with TwinCONTACT

Part no. 1676




- screwless spring terminals
- suitable for through wiring
- straight
- blanking flange to close unused apertures part no. 41419

Technical specifications

|                           |                         |
|---------------------------|-------------------------|
| Ampere                    | 16 A                    |
| Poles                     | 4 p                     |
| Voltage                   | 50-500 V                |
| Clock position            | 10 h                    |
| Hertz                     | 100-300 Hz              |
| Connection technology     | Screwless - TwinCONTACT |
| Contact                   | standard                |
| Protection type           | IP 44                   |
| Flange                    | 75x75 mm                |
| Fixing hole               | 60x60 mm                |
| Weight                    | 140 g                   |
| Declaration of Conformity | VDE, EAC, CQC           |

Drawing

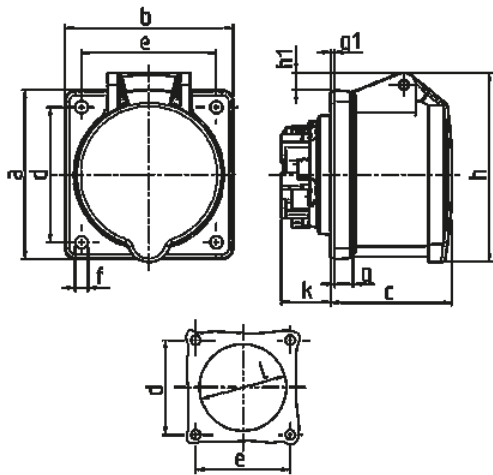

| Drawing                  | Amp.  | 16  |     |     | 32  |     |     |
|--------------------------|-------|-----|-----|-----|-----|-----|-----|
|                          |       | 3   | 4   | 5   | 3   | 4   | 5   |
| 1 MB 464                 | Poles |     |     |     |     |     |     |
| Dim. in mm               | a     | 75  | 75  | 75  | 75  | 75  | 75  |
|                          | b     | 75  | 75  | 75  | 75  | 75  | 75  |
|                          | c     | 53  | 53  | 54  | 64  | 64  | 64  |
|                          | d     | 60  | 60  | 60  | 60  | 60  | 60  |
|                          | e     | 60  | 60  | 60  | 60  | 60  | 60  |
|                          | f     | 5.5 | 5.5 | 5.5 | 5.5 | 5.5 | 5.5 |
|                          | g.    | 8   | 8   | 8   | 8   | 8   | 8   |
|                          | g.1   | 2   | 2   | 2   | 2   | 2   | 2   |
|                          | h     | 75  | 80  | 85  | 89  | 89  | 95  |
|                          | h1    |     | 5   | 8   | 10  | 10  | 12  |
|                          | k     | 22  | 22  | 22  | 28  | 28  | 28  |
|                          | l     | 43  | 52  | 57  | 60  | 60  | 64  |
| Terminal for cond. cross |       | 1.5 | 1.5 | 1.5 | 2.5 | 2.5 | 2.5 |
| section (mm²) min.-max.  |       | —4  | —4  | —4  | —6  | —6  | —6  |